

-LAKELINE-

PART #s: SPR-HLCT-10-FLXT, SPR-HLCT-10-LONG

Installation of the Lakeline grip extension for the Hellcat 10 round magazines (not Hellcat PRO).

Tools:

- Small Allen Wrench (size does not matter)
- Small flat head screw driver
- Needle nose pliers or hemostats

Procedure

- Put on your safety glasses. Springs are under tension and can come at you out of nowhere like a spider monkey.
- Check that pistol is unloaded and remove magazine. Magazine needs to be unloaded.
- Remove the magazine base by pushing up spring as shown here:




- With the base removed, you should see this:



- Using needle nose pliers or hemostats, clamp on the front of the spring and push in toward the top of the magazine to compress the spring.

Once in, slide the allen wrench in to hold the spring in a compressed position.

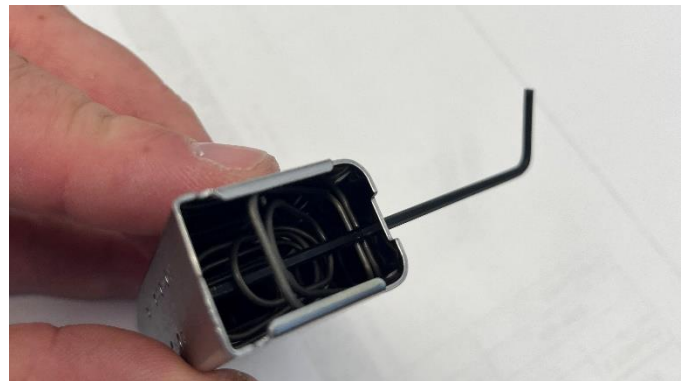

- Slide on the extended magazine base until firmly seated all the way in.



-LA·K·E·L·I·N·E-



- Remove the allen wrench and the spring will lock into place.

Thank you! If you have any questions or problems, the best way to contact us is by email at

info@lakelinellc.com