

LAKELINE LLC

Kahr Charging Handle Installation Instructions:

Tools:


- Small, flat-bladed screw driver
- Safety Glasses
- Coat Hanger tool (wire coat hanger for now)
- Very small screwdriver or small, stiff wire, punch or rod

Procedure

- Put on your safety glasses.
- Check that pistol is unloaded and remove magazine.
- Field strip pistol.
- Remove guide rod, recoil springs and barrel.
- Use small screwdriver and push plunger back and install coat hanger tool as pictured below:




- Use modified large paper clip, rod, punch and depress extractor spring plunger so back plate can be slid off:

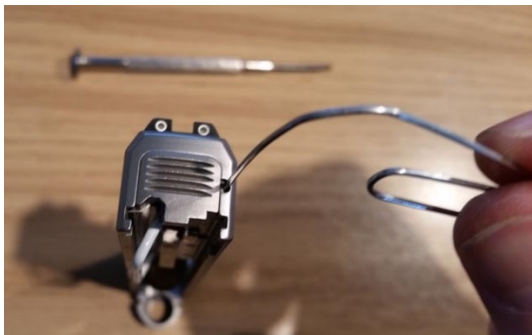

- The plunger you are depressing looks like this with the back plate removed:



- While depressing plunger, insert the charging handle in slots until it is started past plunger and you can remove what you are using to hold the plunger down without it coming back out. Then, grasp charging handle and insert the rest of the way into the back of the slide:

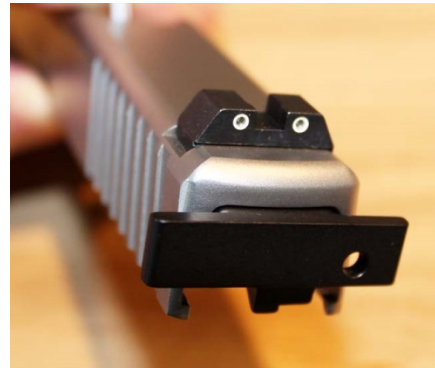

- Reinstall the barrel, recoil assembly and reinstall slide assembly on pistol and insert slide stop pin according to the pistol's users manual.

Here are a couple of YouTube videos:

Disassembly: <https://youtu.be/mi3VFRil2L4>

Reassembly: <https://youtu.be/OXBysFcsLJI>

There is also a .pdf on detail stripping the slide :
<http://www.glocktalk.com/attachments/kahr-detail-strip-slide-assembly-pdf.134037/>

Thank you! If you have any questions or problems, the best way to contact us is by email at info@lakelinellc.com